

**mahindra** <sup>Rise</sup>

# Mahindra Round Baler

Mahindra Round Balers are tractor operated balers that effectively compress cut straw into round bales. Suitable for use in small acreage farms, these balers deliver excellent operational efficiency and reduce manual effort.



# KEY FEATURES



**High Productivity (t/h)**



**Adjustable Bale Density**




**High Number of Bales Per Hour**



## Self-Centralised & Cleaning System

No need to stop machine for lubrication leading to longer productive working hours.

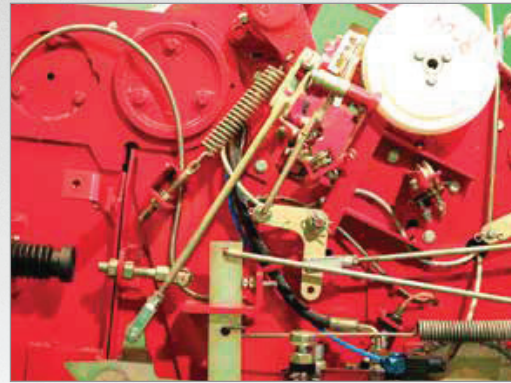

## Adjustable Bale Density

Saves on time and effort and time required to measure and keep bale density same ensuring faster speed of operations.



## Spring Loaded Bale Ramp

Easily rolls the finished bale from machine eliminating manual effort and increasing operational efficiency.




## Electronic Bale Counter

Easily keeps track of bales produced eliminating possible counting errors.



## KEY FEATURES

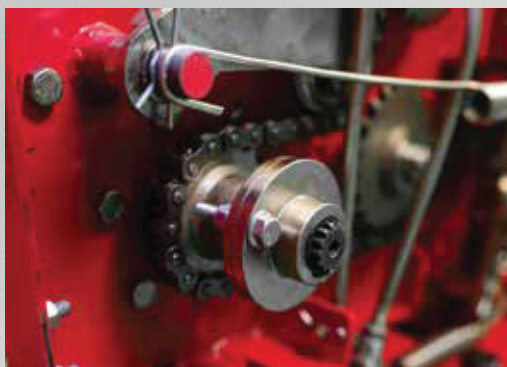

### Shear Bolt as Safety Feature

Shear bolt breaks and halts machine when overloaded protecting the machine from major breakdowns.

## TECHNICAL SPECIFICATIONS

Parameters	Mahindra AB 800-10	Mahindra AB 800 -12	Mahindra AB 1000	Mahindra AB 1050
Bale Length(mm)	700	700	930	1050
Bale Diameter(mm)	500	500	1050	1050
Bale Weight(kg)	15-20	15-20	25-35	25-35
Binding Twine	Jute Twine	Jute Twine	Jute Twine	Jute Twine
Pickup Width(mm)	800	800	1060	1175
Tractor Power Range(hp/kw)	35-45 dual clutch / 26 - 34			
PTO speed(r/min)	540	540	540	540
Dimension(mm)	1435x1250x1200	1435x1250x1200	1550x 1450x1250	1740x1450x1250
Weight(kg)	515	515	670	625
Hitch Point(Type)	CAT II	CAT II	CAT II	CAT II

\* Specifications can be changed without notice, due to continuous improvement in product.





**Address**

Mahindra & Mahindra Ltd. Farm Equipment Sector,  
Farm Division AFS Headquarters, Mahindra Tower,  
1<sup>st</sup> Floor, Akurli Road, Kandivali (E), Mumbai-400101,  
India

**Dealer's / Distributor's stamp**

